

# PP4348 & PP4348-SW Mount

PARAPET, ROOFTOP MOUNT, SPECTRA®, ESPRIT®, SARIX ADAPTER


## Product Features

- Aluminum Construction
- Cable Feedthrough Hole
- Supports up to 75 Pounds (34 kg)
- Rooftop Parapet Adapter for Spectra®, Esprit® Wall Mounts
- Design Includes Four Mounting Studs for Quick, Simple Installation of Mount Arms.
- Mounts on a Flat Roof or Smooth Horizontal Surface

The **PP4348 & PP4348-SW** is a rooftop parapet adapter designed for use with Spectra®, Esprit®, wall mounts. For Spectra pendant domes, use the IWM Series or IDM4018 wall mounts. For Esprit positioning systems, use the EA4348 adapter with the EWM wall mount.

The PP4348 & PP4348-SW mounts directly on a flat roof or smooth horizontal surface and is sufficient in height to clear most parapet walls. The PP4348 & PP4348-SW are capable of complete 360-degree rotation and will support up to 75 pounds (34 kg).

The **PP4348 & PP4348-SW** are constructed of aluminum and have a gray or white polyester powder coat finish.

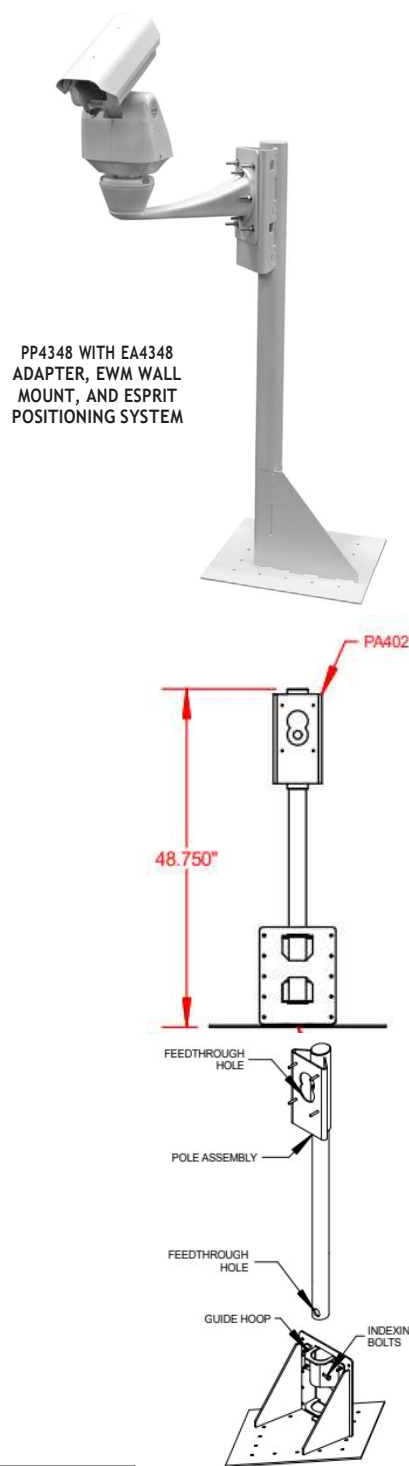

ROOF BASE HAS Ø.381 (.967) THRU FOR 3/8-16 FASTENER

Figure 1. PP4348 Exploded View

# TECHNICAL SPECIFICATIONS

## MODEL

PP4348 Rooftop parapet adapter for use with IWM Series, IDM4018, and EA4348 Mounts. Painted Pelco Light Gray polyester powder coat.

PP4348-SW Same as PP4348. Painted Pelco White RAL 9003 polyester powder coat.

## RELATED PRODUCTS

IWM Series Wall mount with cable feedthrough hole for Spectra®, Sarix Series pendant domes IWM-SW. Painted Pelco Light Gray polyester powder coat.

IWM-SW Series Same as IWM. Painted Pelco White RAL 9003 polyester powder coat.

IDM4018 Wall mount with cable feedthrough hole and removable front end cap for Spectra, Sarix Series pendant domes. Painted Pelco Light Gray polyester powder coat.

IDM4018-SW Same as IWM. Painted Pelco White RAL 9003 polyester powder coat.

EWM Esprit wall mount arm.

EA4348 Adapter plate for mounting Esprit®; use with EWM wall mount for Esprit.

## MECHANICAL

Positioning Adjustment Unlimited 360°

## GENERAL

Suggested Mounting Method	Secure with a minimum of eight 3/8-inch fasteners (not supplied) suitable for the mounting surface
Adapter Mounting	Four 5/16-inch mounting studs, flat washers, lock washers and nuts supplied for mounting IDM4018, IWM Series, or EA4348 mount
Maximum Load	75 lb. (34 kg)
Construction	Aluminum
Environment	Indoor/outdoor
Unit Weight	29.63 lb. (13.44 kg)
Shipping Weight	42 lb. (19.03 kg)



[www.pelco.com](http://www.pelco.com)

Pelco, the Pelco logo, Esprit, Legacy, and Spectra are registered trademarks of Pelco, Inc. Product specifications and availability subject to change without notice. ©Copyright 2002, Pelco, Inc. All rights reserved.